



Hughes 9203  
**BGAN** Patrol  
Military







## THE WORLD'S FIRST BGAN ON THE MOVE TERMINAL FOR USE ON FOOT

**The compact, lightweight Hughes 9203 BGAN communications-on-the-move BGAN terminal enables dismounted soldiers to stay continuously connected to the situational awareness picture via the Battle Management System (BMS) for the first time.**

The BGAN Patrol terminal connects to the satellite network without need for user pointing or intervention and integrates with existing communication systems and batteries. Users no longer need to pause and deploy a static COTP terminal to communicate – reducing vulnerability on the field.


BGAN Patrol provides beyond line of sight (BLOS) communications, extending line of sight (LOS) IP networks independently from any terrestrial networks. Users can connect at standard background IP of up to 200 kbps via ethernet or through the built-in multi-user Wi-Fi feature to support a group of local connections. BGAN PATROL terminal offers reliable connectivity above 30 degrees elevation towards the satellite. Regions below 30 degrees elevation will be supported on a best effort basis.

End user devices, such as Android Tactical devices, can be connected

to the BGAN Patrol terminal to provide data to applications vital to gaining an operational advantage over adversaries in the field. Typical applications include:

- Enablement of Battle Management System (BMS), such as TAK and SitaWare
- Bridging of Mobile Ad-hoc Network (MANET) and Beyond Line of Sight (BLOS) radio networks
- Blue Force Tracking (BFT) of allied forces on live maps
- Laser range finder data to provide an exact distance to long range targets for snipers, artillery, and air support
- Situational Awareness gathering and reception to maximize co-ordination
- Calling for Casualty Medical Evacuation (MedEvac)



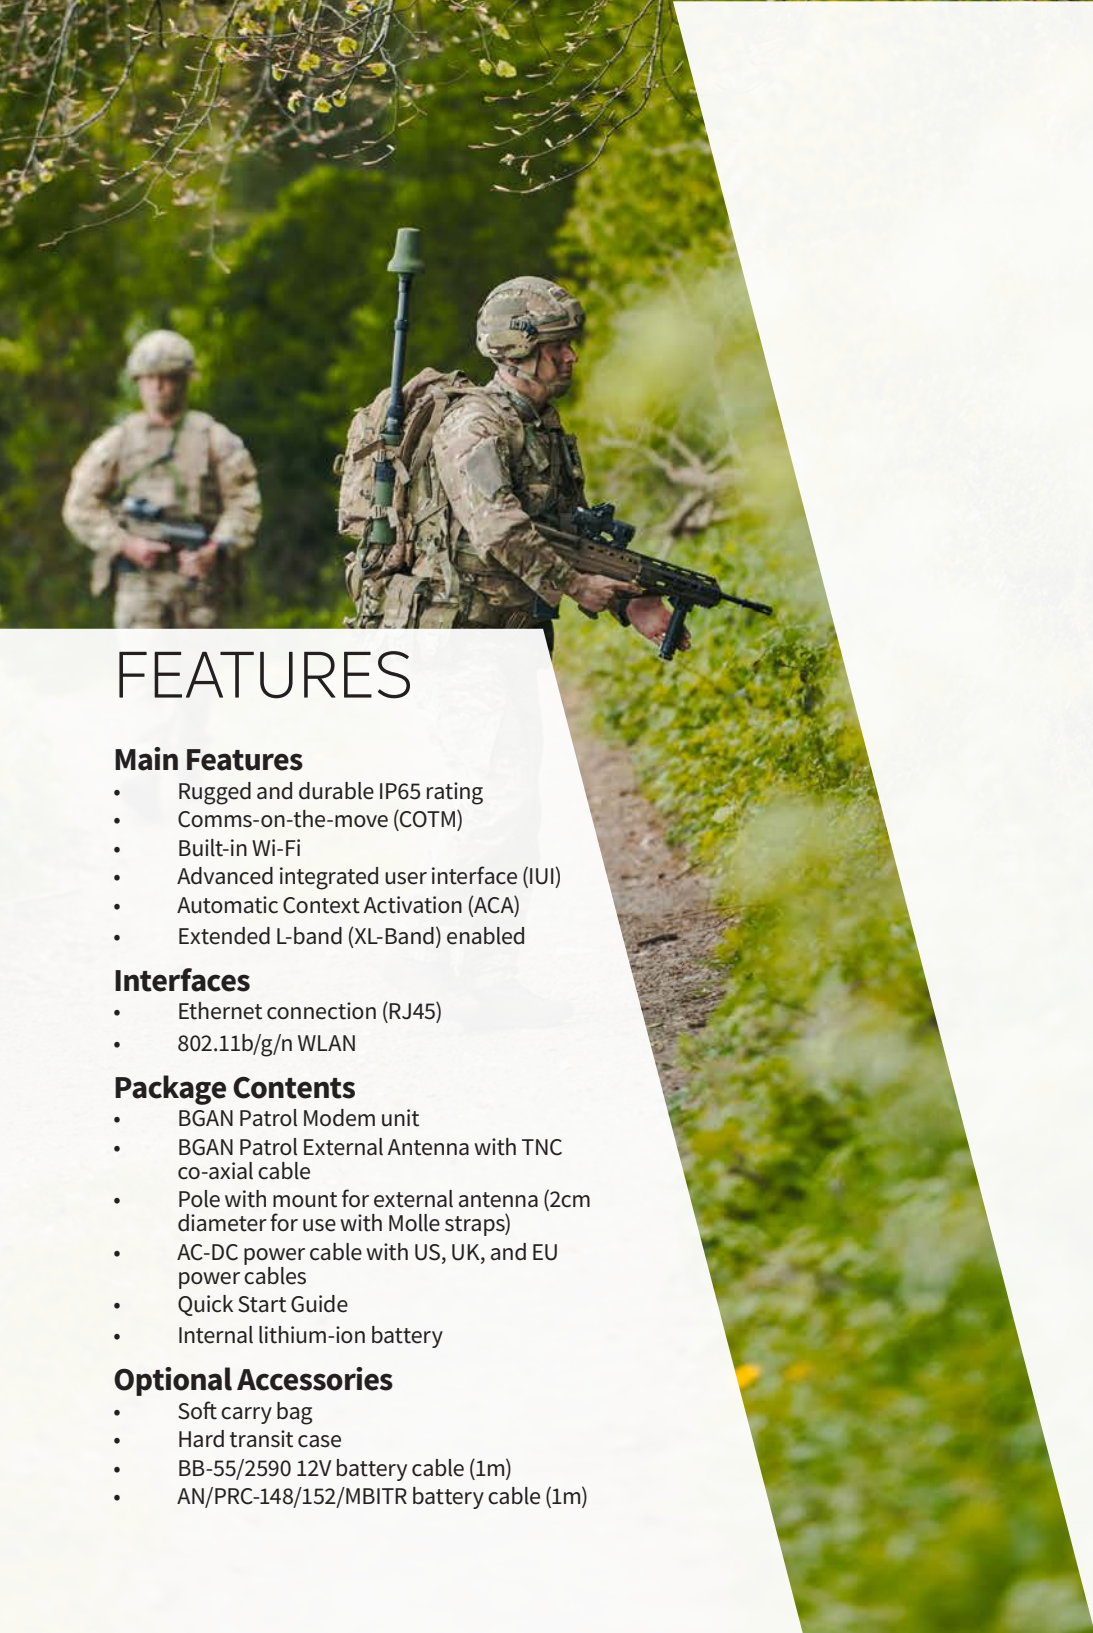



# SPECIFICATIONS

Antenna Type	Omni-directional. No pointing required
Dimensions	
Antenna	153 mm x 100 mm Ø
3-Section Pole	1000 mm x 20 mm Ø Optional gooseneck section available
Terminal Weight	1.4 kg
Frequency	
Satellite TX Frequency	1626.5–1660.5 and 1668–1675 MHz
Satellite RX Frequency	1518–1559 MHz
GPS Frequency	1575.42 MHz  GPS signal via external antenna
Battery life	
Continuous TX Time	Up to 2 hours at 128 kbps
Continuous RX Time	Up to 4 hours at 128 kbps
Standby Time	Up to 36 hours
External power:	
AC-DC power cable with US, UK, and EU power cables	
Optional BB-55/2590 12V battery cable (1m)	
Expected battery requirement for 3 days usage at typical 5%Tx/5%Rx duty cycle.	
<ul style="list-style-type: none"><li>BB-2590 = 1 battery</li><li>BA-5590 = 1 batteries</li><li>AN/PRC-148(MBITR) = 3 batteries</li></ul>	

Environmental Conditions	
Operating Temperature	-5° C to +55° C with battery -25° C to +55° C excluding battery
Storage Temperature	-25° C to +55° C with battery -25° C to +80° C excluding battery
Water and Dust	IP-65 Compliant
Humidity	95% RH at +40° C
Mechanical Vibration	200–2000 Hz, 0.3 m2/s3; MIL-SPEC 810B
Certifications	CE, FCC, EU WEEE, RoHS 3
Interfaces:	<ul style="list-style-type: none"><li>1x RJ45 ethernet connector</li><li>S802.11b/g/n WLAN</li><li>SIM/USIM Slot</li><li>DC barrel connector</li><li>WebUI (feature rich, consistent with Hughes BGAN product line)</li><li>Compatible with the Hughes BGAN App for iOS and Android</li><li>Internal User Interface (iUI) with LCD and button</li></ul>

Elevation Range	30° to 90°
	
	

# FEATURES

## Main Features

- Rugged and durable IP65 rating
- Comms-on-the-move (COTM)
- Built-in Wi-Fi
- Advanced integrated user interface (IUI)
- Automatic Context Activation (ACA)
- Extended L-band (XL-Band) enabled

## Interfaces

- Ethernet connection (RJ45)
- 802.11b/g/n WLAN


## Package Contents

- BGAN Patrol Modem unit
- BGAN Patrol External Antenna with TNC co-axial cable
- Pole with mount for external antenna (2cm diameter for use with Molle straps)
- AC-DC power cable with US, UK, and EU power cables
- Quick Start Guide
- Internal lithium-ion battery

## Optional Accessories

- Soft carry bag
- Hard transit case
- BB-55/2590 12V battery cable (1m)
- AN/PRC-148/152/MBITR battery cable (1m)





While the information in this document has been prepared in good faith, no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability (howsoever arising) is or will be accepted by Viasat, Inc. or any of its officers, employees or agents in relation to the adequacy, accuracy, completeness, reasonableness or fitness for purpose of the information in this document. All and any such responsibility and liability is expressly disclaimed and excluded to the maximum extent permitted by applicable law. Coverage as shown on maps is an approximation and subject to change at any time.

Copyright © 2024 Viasat, Inc. All rights reserved. Viasat, the Viasat logo and the Viasat Signal are registered trademarks in the U.S. and in other countries to Viasat, Inc. All other product or company names mentioned are used for identification purposes only and may be trademarks of their respective owners.

BGAN Patrol Mil July 2024